


AVC310 Solar Aviation Light

Typical Applications

- ▶ Solar Airstrip Light
- ▶ Solar Caution Light
- ▶ Solar Threshold Light
- ▶ Solar Obstruction Light

Major Benefits

- ▶ 5.4km visible range (flashing)
- ▶ Integrated solar/battery system
- ▶ 4 x 2watt solar modules
- ▶ IP68 water and dust proof
- ▶ 7.5Ah SLA battery (user replaceable)

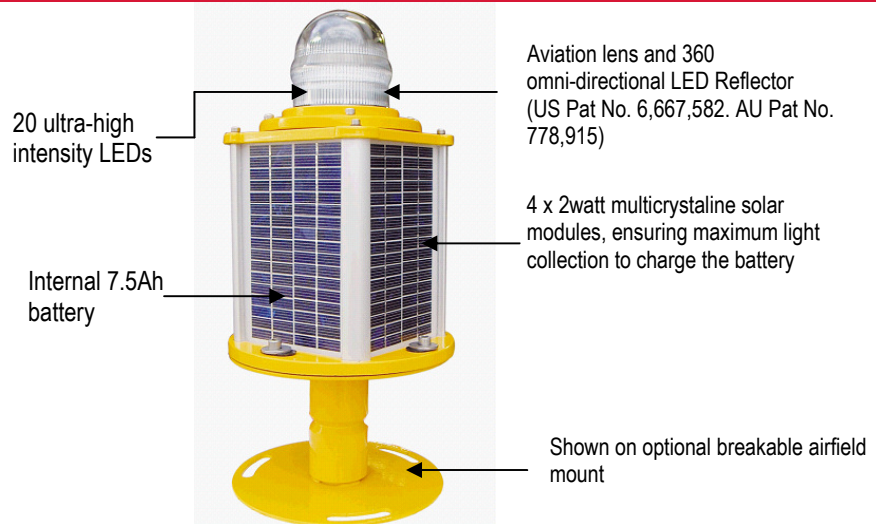

The AVC310 is a robust, completely self-contained solar-powered LED aviation light, designed for a range of installations including strategic and remote runway edge lighting and obstruction lighting.

Incorporating the latest LED technology, the AVC310 provides up to 12 years of reliable service—no more globes to change!

The unit is made from cast aluminium, subject to 7-stage powder-coating in high visibility colours for daytime recognition. Four premium grade solar modules are integrated into the assembly and mounted to collect sunlight at all angles.

The solar array charges an internal 7.5Ah battery during daylight hours and at dusk the light will automatically begin operation.

The unit can be supplied in varying colour outputs to suit applications including runway edge lighting (white) and threshold marking (red/green sectored).

The tough polycarbonate aviation lens is specifically designed for use with LEDs to maximise light intensity and uniformity.

For defence applications the unit is also available in infrared (IR).

Systems Interface Limited
Unit 71.5 Dunsfold Park
Cranleigh, Surrey, GU6 8TB
United Kingdom

Tel: +44(0)1483 267 066
www.systemsinterfaceltd.com



Total Turnkey Airport Solutions



AVC310 Solar Aviation Light

SPECIFICATIONS

Light Characteristics

Light Source	20 ultra-high intensity LEDs
Available Colours	Red, Green, White, Yellow, Amber, Blue, Sectored Combinations
Peak Intensity (cd)	>25 flashing, >10 fixed-on (colour dependent)
Visible Range	>3 flashing, >2 fixed-on
Horizontal Output (degrees)	360
Vertical Divergence (degrees)	0 to +10
Reflector Type	Omni-directional 360° LED Reflector (US Pat.No. 6,667,582. AU Pat. No. 778,918)
Available Flash Characteristics	>250 including fixed-on (user-adjustable)
Intensity Adjustments	Adjustable in 25% increments
LED Life Expectancy (hours)	>100,000

Electrical Characteristics

Current Draw (mA)	120
Circuit Protection	Integrated
Operating Voltage (v)	12
Autonomy (days)	>20 (14 hour darkness, 12.5% duty cycle)
Temperature Range	-40 to 80°C

Solar Characteristics

Solar Module Type	Multicrystalline
Output (watts)	8 (4 x 2watt)
Solar Module Efficiency (%)	14
Charging Regulation	Microprocessor controlled

Power Supply

Battery Type	SLA (Sealed Lead Acid)
Battery Capacity (Ah)	7.5
Nominal Voltage (v)	12

Physical Characteristics

Body Material	7-stage powder-coated aluminium
Lens Material	LEXAN® Polycarbonate—UV stabilised
Lens Design	External optics with interior flute design
Mounting	4 x 17mm holes on 200mm PCD
Height (mm/inches)	355 / 14
Width	245 / 9 2/3
Mass (kg/lbs)	6.4 / 14 1/8
Product Life Expectancy	Up to 12 years

Certification

CE	EN61000-6-3:1977. EN61000-6-1:1997
Quality Assurance	ISO 9001:2000
Waterproof	IP68

Intellectual Property

Patents	US Pat.No. 6,667,582. AU Pat. No. 778,918
Trademarks	Avlite® is a registered trademark of Avlite Systems

Warranty


Full 3 year warranty

Options Available

IR

CE

*Specifications subject to change or variation without notice

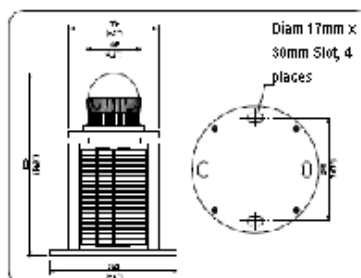

Systems Interface Limited
Unit 71.5 Dunsfold Park
Cranleigh, Surrey, GU6 8TB
United Kingdom

Tel: +44(0)1483 267 066
www.systemsinterfaceltd.com



Total Turnkey Airport Solutions